



For any assistance, please contact your nearest retailer listed at www.mountainbuggy.com

Model MB1-CLIP4
Issue August 2009

Safety certified: ASTM F833-08



send 102-112 Daniell St, Newtown 6021, Wellington, New Zealand
ph +64 4 380 0833
fax +64 4 380 0137

Designed in New Zealand. Made in China.

installation instructions

urban jungle™

Graco Snugride™ travel system



Installation instructions for the travel system that fits the SnugRide™ infant carseat by Graco™.

WARNINGS

Check you have the correct travel system for your carseat.

WARNINGS

Do not use this travel system until you have read and understood the instructions!

WARNINGS

Never leave your child unattended.

WARNINGS

Do not use accessories not designed for your buggy as they may be unsafe.

WARNINGS

Do not leave your baby in carseat (on or off stroller) for long periods of time.

IMPORTANT CHECKS

- Make sure baby is harnessed into carseat using the manufacturer's instructions.
- When fitting carseat onto travel system, ALWAYS keep a steady hand on carseat and baby, until travel system strap is securely fastened.
- Check travel system is engaged correctly onto buggy frame and cannot move in any direction. (Refer back to installation instructions to ensure positioning of snap locks are correct).
- Do not use travel system if you are unable to secure carseat or travel system. In this case, contact your store/distributor where the buggy was purchased from, for more help.
- It is recommended that you practise the following instructions without baby in carseat.



PREPARING THE BUGGY

! WARNINGS

ALWAYS put the buggy brake on.


Note: The buggy seat does not need to be removed to fit travel system.

1. Temporarily remove sunhood.
2. Unfasten B & C fasteners, peel fabric back exposing frame.
3. Recline seat and loosen strap beneath seat at point A.

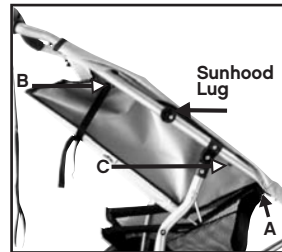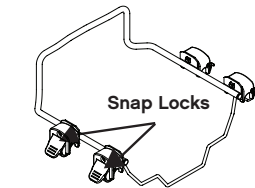

FITTING TRAVEL SYSTEM TO BUGGY

1. Open up all snap locks and press travel system on to frame so that top snap locks are directly above sunhood lugs (on both sides).

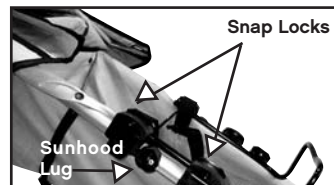


FITTING TRAVEL SYSTEM TO BUGGY (continued)

2. Close all snap locks down flat, making sure you hear the lock "click" indicating they are fully locked.
3. Reattach sunhood.



FITTING CARSEAT ONTO TRAVEL SYSTEM

1. Place carseat in travel system so that infant is facing buggy handle bar.
2. Ensure carseat latch has clicked on to the travel system bar.
3. Pass wide straps on travel system through slots provided on each side of the carseat. (the slots are the same as used for the carseat belt).
4. Buckle the wide straps across top of the carseat and tighten firmly by pulling on free end of strap.

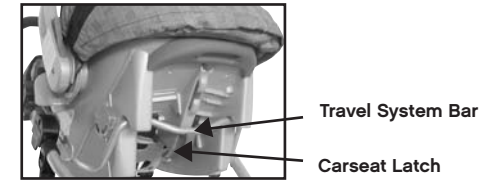

REMOVE CARSEAT FROM TRAVEL SYSTEM

1. Unbuckle travel system buckle and remove straps from slots on carseat.
2. Pull up carseat latch handle and lift carseat upwards.



REMOVE TRAVEL SYSTEM FROM BUGGY

1. Remove sunhood.
2. Open all four snap locks by lifting up levers and lift travel system off buggy.